



OLENA

Family

Category 2 - Circular shapes


These luminaires are designed for calmness, harmony and mildness. Besides with various colors, you can cheer up every place with our circular luminaires. Designers and architect can use their creativity free with this system.

Olena luminaires

The most popular Olena is available in a large variety of profiles. These luminaires are designed with simplicity and calmness. Circle is a perfect form with a meaning of completeness. The diameter starts from 45 cm and goes up to your desired sizes. Creating variety of shapes, you can connect Olena with linear profiles as well or individual project requirements can be covered.

Body Color	Color temperature	Driver type
B ●	1 RGBW	D DALI
G ●	2 2700K	N Non-dimmable
W ○	3 3000K	B Bluetooth
A ●	4 4000K	Power
R	5 Tuneable White	1 15W
S	Light	2 23W
Cover	1 Direct only	3 30W
S Standard (opal)	2 Direct/indirect	
	3 Indirect only	

Mounting Types

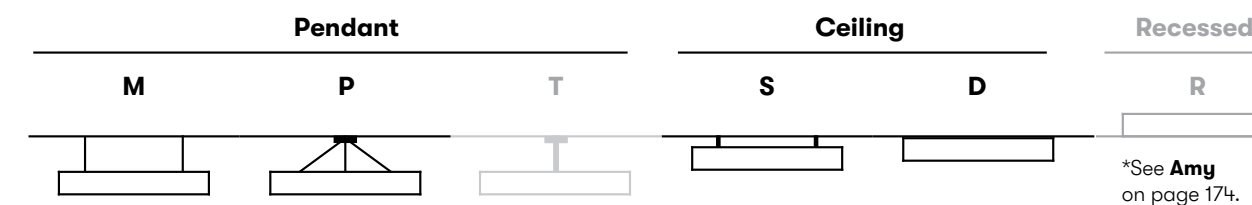

Family members & Available Profiles

OLENA 35



A 40x35

OLENA 50



B 55x50

OLENA 75



C 75x75
D 100x75

OLENA 85



E 75x85
F 100x85

OLENA 100




G 75x100
H 100x100

OLENA 200



I 100x200

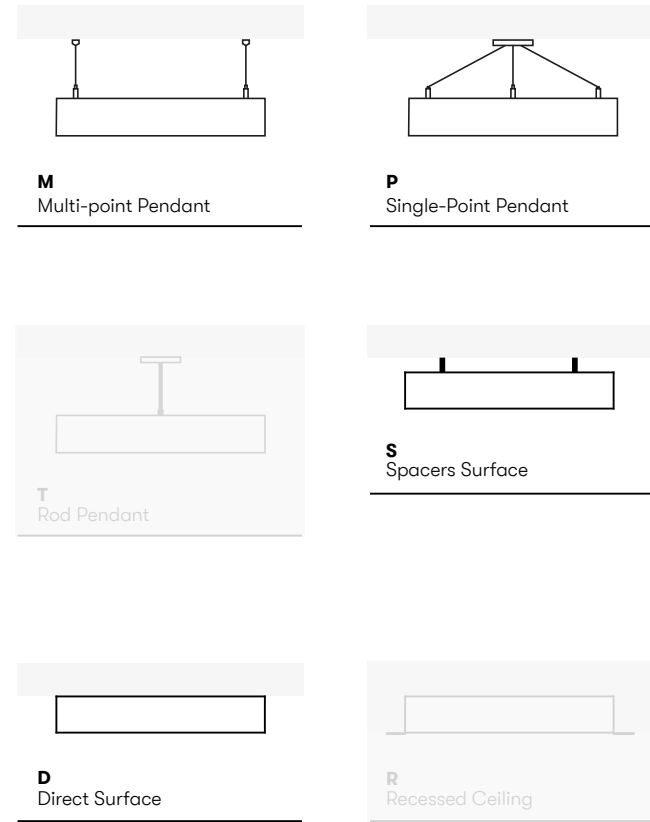

OLENA 35

LED luminaire. Body made of solid aluminium profile. Custom length upon request. Surface in white, black, grey, anthracite, RAL and other Special colors. Available with external driver.

Specification


Profiles

OL1A




Code	Size	Power*	Light Flux**
OL1X- 1	Ø450	32 W	3087 lm
2	Ø600	43 W	4117 lm
3	Ø750	54 W	5146 lm
4	Ø1000	72 W	6861 lm
5	Ø1200	87 W	8233 lm
6	Ø1500	108 W	10291 lm
7	Ø1800	130 W	12350 lm
8	Ø2000	144 W	13722 lm







M
Multi-point Pendant




P
Single-Point Pendant




T
Rod Pendant



S
Spacers Surface



D
Direct Surface




R
Recessed Ceiling

OLENA 50

LED luminaire. Body made of solid aluminium profile. Custom length upon request. Surface in white, black, grey, anthracite, RAL and other Special colors. Available with external driver.







Specification

Profiles



Code	Size	Power*	Light Flux**	
OL1X-	1	Ø450	32 W	3087 lm
	2	Ø600	43 W	4117 lm
	3	Ø750	54 W	5146 lm
	4	Ø1000	72 W	6861 lm
	5	Ø1200	87 W	8233 lm
	6	Ø1500	108 W	10291 lm
	7	Ø1800	130 W	12350 lm
	8	Ø2000	144 W	13722 lm
OL2X-	1	Ø450	48 W	4631 lm
	2	Ø600	65 W	6176 lm
	3	Ø750	81 W	7719 lm
	4	Ø1000	108 W	10292 lm
	5	Ø1200	131 W	12350 lm
	6	Ø1500	162 W	15437 lm
	7	Ø1800	195 W	18525 lm
	8	Ø2000	216 W	20583 lm



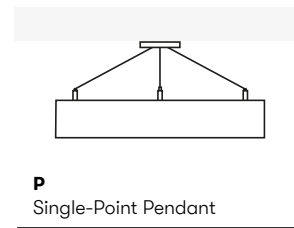
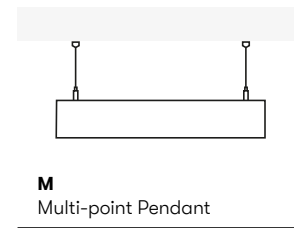


OLENA 75

LED luminaire. Body made of solid aluminium profile. Custom length upon request. Surface in white, black, grey, anthracite, RAL and other Special colors. Direct/indirect version available with external driver.


Specification

Profiles




Code	Size	Power*	Light Flux**	
OL1X-	1	Ø450	32 W	2925 lm
	2	Ø600	43 W	3900 lm
	3	Ø750	54 W	4875 lm
	4	Ø1000	72 W	6500 lm
	5	Ø1200	87 W	7800 lm
	6	Ø1500	108 W	9750 lm
	7	Ø1800	130 W	11700 lm
	8	Ø2000	144 W	13000 lm
OL2X-	1	Ø450	49 W	4387 lm
	2	Ø600	65 W	5850 lm
	3	Ø750	81 W	7312 lm
	4	Ø1000	108 W	9750 lm
	5	Ø1200	130 W	11700 lm
	6	Ø1500	162 W	14625 lm
	7	Ø1800	195 W	17549 lm
	8	Ø2000	217 W	19499 lm







M
Multi-point Pendant




P
Single-Point Pendant




T
Rod Pendant



S
Spacers Surface



D
Direct Surface



R
Recessed Ceiling

OLENA 85

LED luminaire. Body made of solid aluminium profile. Custom length upon request. Surface in white, black, grey, anthracite or RAL colors. Further Selected Pont Light special colors available.

Specification

Profiles




Code	Size	Power*	Light Flux**	
OL1X-	1	Ø450	32 W	2860 lm
	2	Ø600	43 W	3813 lm
	3	Ø750	54 W	4767 lm
	4	Ø1000	72 W	6355 lm
	5	Ø1200	87 W	7626 lm
	6	Ø1500	108 W	9533 lm
	7	Ø1800	130 W	11440 lm
	8	Ø2000	144 W	12711 lm
OL2X-	1	Ø450	49 W	4290 lm
	2	Ø600	65 W	5720 lm
	3	Ø750	81 W	7150 lm
	4	Ø1000	108 W	9533 lm
	5	Ø1200	130 W	11440 lm
	6	Ø1500	162 W	14300 lm
	7	Ø1800	195 W	17159 lm
	8	Ø2000	217 W	19066 lm







M
Multi-point Pendant




P
Single-Point Pendant



T
Rod Pendant



S
Spacers Surface



D
Direct Surface





R
Recessed Ceiling

OLENA 100

LED luminaire. Body made of solid aluminium profile. Custom length upon request. Surface in white, black, grey, anthracite or RAL colors. Further Selected Pont Light special colors available.


Specification

Profiles




Code	Size	Power*	Light Flux**
OL1X- 1	Ø450	32 W	2762 lm
2	Ø600	43 W	3683 lm
3	Ø750	54 W	4604 lm
4	Ø1000	72 W	6139 lm
5	Ø1200	87 W	7366 lm
6	Ø1500	108 W	9208 lm
7	Ø1800	130 W	11050 lm
8	Ø2000	144 W	12277 lm
OL2X- 1	Ø450	49 W	4144 lm
2	Ø600	65 W	5525 lm
3	Ø750	81 W	6906 lm
4	Ø1000	108 W	9208 lm
5	Ø1200	130 W	11050 lm
6	Ø1500	162 W	13812 lm
7	Ø1800	195 W	16574 lm
8	Ø2000	217 W	18416 lm







M
Multi-point Pendant




P
Single-Point Pendant




T
Rod Pendant



S
Spacers Surface



D
Direct Surface



R
Recessed Ceiling


OLENA 200

LED luminaire. Body made of solid aluminium profile. Custom length upon request. Surface in white, black, grey, anthracite or RAL colors. Further Selected Pont Light special colors available.


Specification

Profiles

OL1



OL2



Code	Size	Power*	Light Flux**	
OL1X-	1	Ø600	45 W	3134 lm
	2	Ø750	58 W	4044 lm
	3	Ø1000	72 W	5055 lm
	4	Ø1200	87 W	6066 lm
	5	Ø1500	108 W	7583 lm
	6	Ø1800	130 W	9100 lm
	7	Ø2000	144 W	10111 lm
OL2X-	1	Ø600	67 W	4702 lm
	2	Ø750	87 W	6066 lm
	3	Ø1000	108 W	7583 lm
	4	Ø1200	130 W	9100 lm
	5	Ø1500	162 W	11375 lm
	6	Ø1800	195 W	13650 lm
	7	Ø2000	217 W	15166 lm

