












IP66



220-240V
50/60Hz

ALUMAX LED	A	D
1.2ft	624	max. 534
1.4ft	1224	max. 1134
1.5ft	1524	max. 1434
2.2ft	624	max. 534
2.4ft	1224	max. 1134
2.5ft	1524	max. 1434



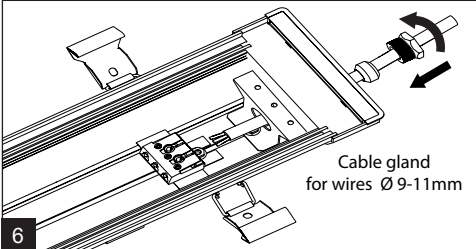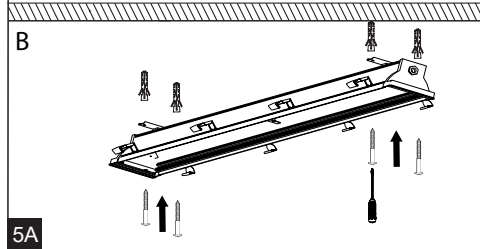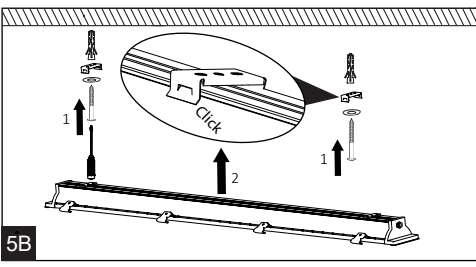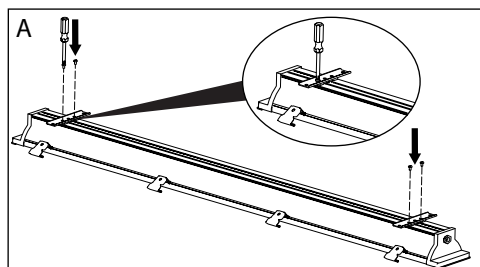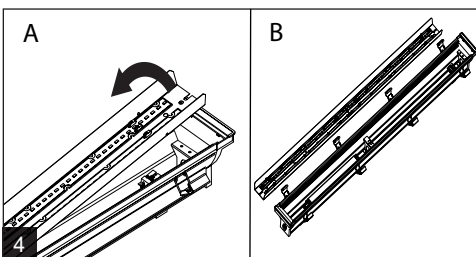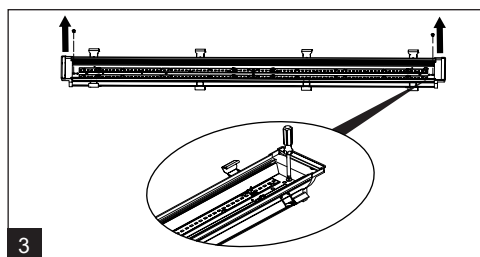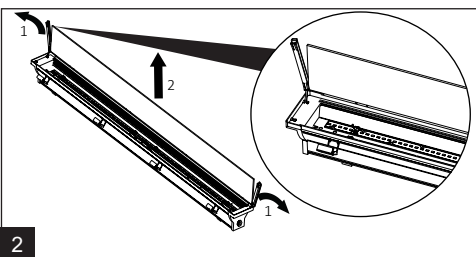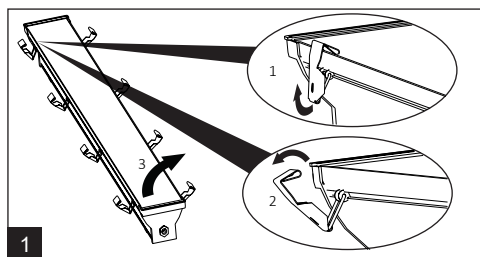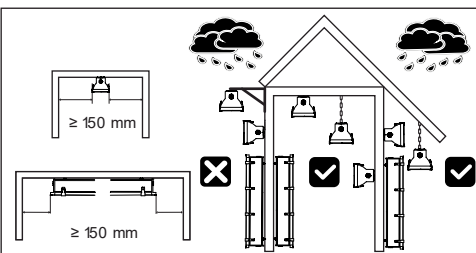IP66







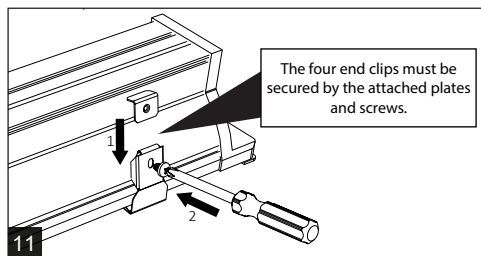
220-240V
50/60Hz

Table of maximal number of luminaires in one line				10A B Σ	16A B Σ	10A C Σ	16A C Σ
Length	Σ1m	Σ2m	Σ3m	luminaires	luminaires	luminaires	luminaires
1.2ft	1300	1600	2200	32	50	52	85
1.4ft	2600			32	50	52	85
1.4ft	3200	4400		10	16	16	26
1.5ft	3250	4000	5500	10	16	16	26
2.2ft	2600			32	50	52	85
2.2ft	3200	4400		10	16	16	26
2.4ft	5200	6400	8800	10	16	16	26
2.5ft	6500	8000	11000	10	16	16	26

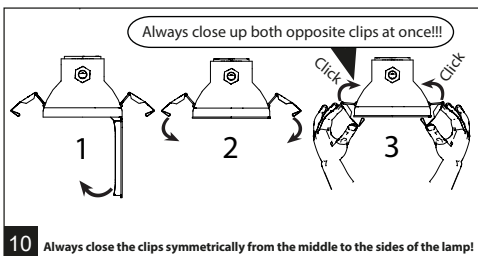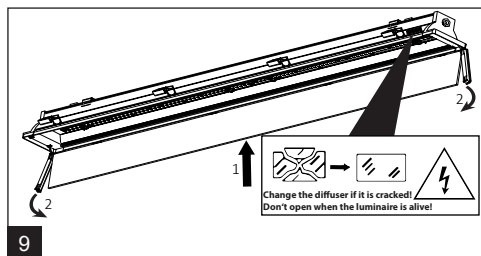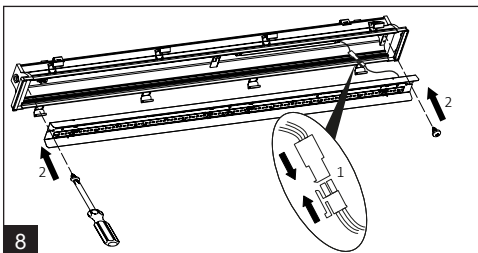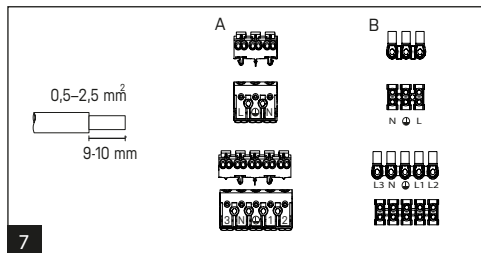

The light source in this luminaire may be replaced only by the manufacturer or its contractual service technician or similarly qualified person!

Take care while fitting glass on rubber sealing for impacts on side of the glass and fast temperature changes. Properties of heat toughened glass and its susceptibility to breaking follow standard EN 12150-1.

Installation can only be carried out by an authorized person and according to the mounting instructions. Any other installation is considered to be improper. For well installation and good luminaire work is necessary ensure a planarity of a mounting surface. Make sure that the luminaire is always disconnected from the power supply before the installation work. Do not use the luminaire if damaged or if damaged the power cable. Only damp microfiber cloth can be used for cleaning. Technical changes are subjected without notice. Do not dispose the luminaire or its parts as household waste, but make the proper recycling.